
# fresco® whirlpool bath and soaking bath

fresco. the ancient art of painting on moist plaster surfaces. where colors penetrate, blend, soften-dissolve.

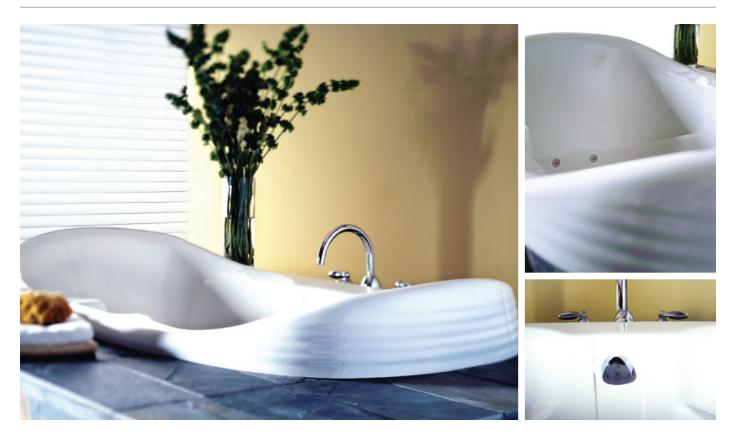

Like its namesake, the Fresco<sup>®</sup> is pure art.

### whirlpool features:

- 4 Fully adjustable TheraPro<sup>™</sup> jets
- 2 AccuPro<sup>™</sup> foot jets
- Electronic on/off control
- Sculpted armrest and contoured backrest
- Integral handrail
- Exclusive Tru-Level<sup>™</sup> base
- Slip-resistant bottom
- Patented Fixed Air Flow System
- Drain included on whirlpool baths

### fresco® whirlpool bath

model number: BM90 (center drain RH pump), BM95 (center drain LH pump)

exterior dimensions: 71<sup>1</sup>/<sub>2</sub>" long x 42" wide x 27<sup>1</sup>/<sub>4</sub>" high

interior dimensions: 47" long x 25" wide

# of Jets/type of Jets:
4 TheraPro<sup>™</sup> Jets,
2 AccuPro<sup>™</sup> Foot Jets

operating gallons: **63 gallons** 

### fresco<sup>®</sup> soaking bath

model number: BM85

exterior dimensions:  $71\frac{1}{2}$ " long x 42" wide x 27<sup>1</sup>/<sub>4</sub>" high

interior dimensions: 47" long x 25" wide



Detail: The Fresco<sup>®</sup> whirlpool bath's high, molded backrest supports a tired head and shoulders, while Jacuzzi's exclusive AccuPro<sup>™</sup> jets deliver an even, perfectly pressured foot massage.



# Fresco<sup>®</sup> Whirlpool Bath Model: BM90, BM95

Fresco<sup>®</sup> Bath

Model: BM85

## **Ordering Information**

### Product Code:

BM90 Fresco® Whirlpool Bath


- Right Hand BM95 Fresco<sup>®</sup> Whirlpool Bath Left Hand
- BM85 Fresco<sup>®</sup> Bath
- Center Drain Location

## Accessories / Hardware:

Trip-Lever Drain Kit: #X559 Rotary Drain Kit, 26" Cable: #8730 TheraPro™ Jet Rings Kit: #D095 AccuPro™ Jet Rings Kit: #P556

• Trim Kit Finishes Available:

- (827) Chrome (898) – Brushed Chrome (815) – Satin Nickel (829) – Bright Brass
- (805) Platinum
- (826) Brushed Nickel (845) – Oil Rubbed Bronze

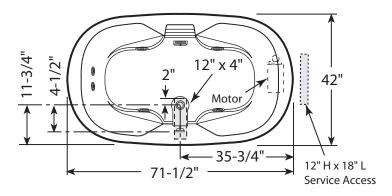

Product Shown: Fresco® Whirlpool Bath Right Hand Shown Model: BM90 \* Measurements inside unit represent cutout in floor to allow for drain/overflow. Minimum Service Access dimensions given.

## **Installation Notes**

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

# PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Electrical Components and Electrical Specifications do not apply to non-jetted baths.

## **Technical Specifications**

**Dimensions** 71-1/2" L x 42" W x 27-1/4" H (1816 mm) L x (1067 mm) W x (692 mm) H

### Drain/Overflow

A: 20-1/8" (511 mm) B: 11-3/4" (299 mm)

### Cutout

Template Provided P/N: P188000

## Total Weight

BM90, BM95: 921 lb (418 kg) / 44 lb/sq. ft. (216 kg/m²) BM85: 896 lb (406 kg) / 43 lb/sq. ft. (210 kg/m²)

### **Operating Gallonage** 63 U.S. Gal. (239 Liters)

## **Product Weight**

BM90, BM95: 146 lb (66 kg) BM85: 121 lb (55 kg)

## Skirt Mounting

Not Available

#### Electrical Specifications Models BM90, BM95 only Requires a dedicated GFCI protected separate circuit. Motor/Pump: 120 VAC, 15 AMP, 60 Hz. RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

Heater (Optional) Models BM90, BM95 only Requires a dedicated GFCI protected separate circuit. RapidHeat<sup>TM</sup>: P/N S750000

